


EN60 320-1 Standard Sheet C13 Class I Rewirable Cold Condition

STRAIGHT FEMALE CONNECTOR



PX0587

- Cable Mounting
- Rewirable
- Screw Terminals
- 10A, 250V a.c.

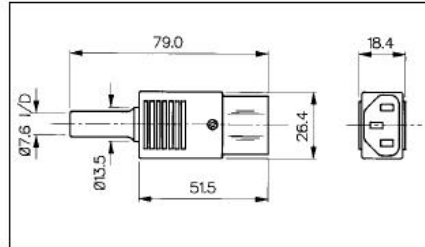


SIDE ENTRY FEMALE CONNECTOR



PX0587/SE

- Cable Mounting
- Rewirable
- Screw Terminals
- 10A, 250V a.c.

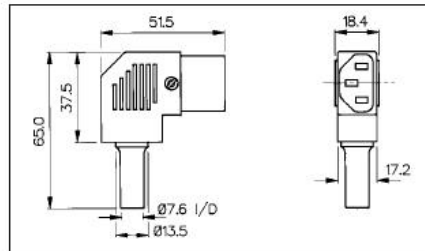

Specifications

Terminations:
Colours:
Max. Rating:
Contact Resistance:
Insulation Resistance:
A.C. Breakdown:

Operating Temp.
Withdrawal Force:
Mouldings:
Contacts

PX0587/Col

Screw Terminals
No suffix (Black), /WH (White), /GY (Grey)
10A, 250V AC
<10mΩ
>10³ MΩ
Contact-Contact 4.5kV.
(Contacts-Accessible) Parts 4kV
-40°C to +70°C
10N (Min.) 50N (Max.)
Nylon, Flammability Rating UL94V-0
Brass, Clean

PX0587/SE/Col

Screw Terminals
No suffix (Black), /WH (White), /GY (Grey)
10A, 250V AC
<10mΩ
>10³ MΩ
Contact-Contact 4.5kV.
(Contacts-Accessible) Parts 4kV
-40°C to +70°C
10N (Min.) 50N (Max.)
Nylon, Flammability Rating UL94V-0
Brass, Clean

Approvals:



Accessories / Notes:

VDE and ENEC approval for black and white versions only.



VDE and ENEC approval for black and white versions only.

Mating Inlets:

PX0575, PX0579, PX0580, PF0001,
PF0011, PF0030, PF0033

PX0575, PX0579, PX0580, PF0001,
PF0011, PF0030, PF0033

RoHS

Compliant

Compliant