

Note


No.	A	B	C
09	16.33	24.99	30.81
15	24.66	33.32	39.14
25	38.38	47.04	53.04
37	54.83	63.50	69.32

ELECTRICAL CHARACTERISTICS

Contact Current Rating:3Amperes.
 Dielectric Withstanding Voltage:AC 500V at sea level.
 Insulation Resistance:1000Megohms Min.
 Contact Resistance:30Milliohms Max.
 Operation Temperature : -55°C to +105°C.

Material


Contact :Copper Alloy.
 Insulator:PBT, [Select PA6T /LCP /PA9T]
 Shell: SPCC.
 Z-Piece: Fe.
 Screw: Copper Alloy.
 Rivet: Copper Alloy or Zinc.

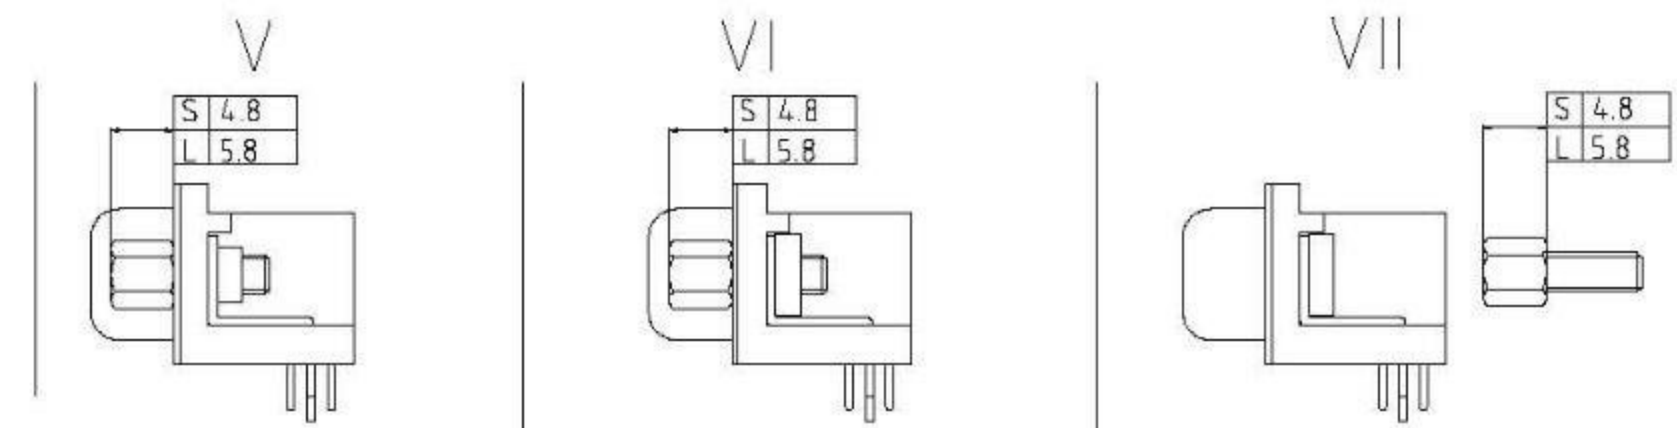

C0550-XXFACXXXR
 C0550-XXFAEXXXR

C0550-XXFBCXXXR
 C0550-XXFBEXXXR

C0550-XXFBBXXXR
 C0550-XXFBDXXXR

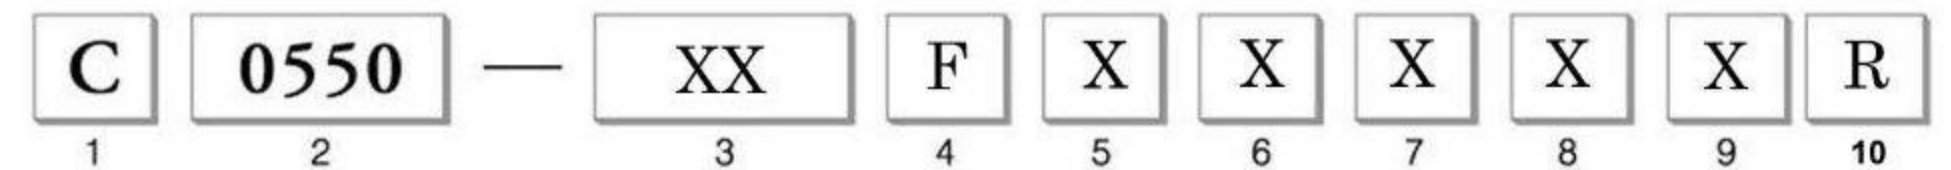

- 1. PRODUCTS:
C:Connector
- 2. SERIES NO.:
0550
- 3. CONTACT NO.:
09,15,25,37
- 4. CONTACT TYPE:
F:Female
- 5. MOUNTING OPTION:
A:Boardlock (Z-Shape)
B:Rivet W/Boardlock (Z-Shape)
- 6. ACCESSORIES:
B:ADD Screws(4.8*11.8)
C:Fix Screws(4.8*11.8)
D:ADD Screws(5.8*12.0)
E:Fix Screws(5.8*12.0)
- 7. SHELL PLATING:
T:Tin
N:Nickel
- 8. CONTACT PLATING:
S:Selective Gold
G:Gold Flash
A:Gold 5U"
B:Gold 10U"
C:Gold 15U"
D:Gold 30U"
- 9. OTHERS:
B:Black Insulator
L:Blue Insulator
- 10. ROHS LOW-LEAD

RoHS Compliant **HSM** 玄茂科技股份有限公司 **HSUAN MAO TECHNOLOGY CO., LTD.**

APPD. 核准 HELEN	SCALE 比例 参考	TOLERANCE .X ±0.30 .XX ±0.25 .XXX ±0.150 Ang. ±2°	PART NAME 品名 D-SUB PCB RIGHT ANGLE 7.2mm STAMPED PIN XXP FEMALE ROHS LOW LEAD
DWG. 製圖 ABBY	UNIT 單位 MM	SIZE 紙張尺寸 A4	PART NO. 料號 C0550-XXFXXXXXR
DATE 制表日 2011/05/25	PAGE 張數 1 OF 1	REV. 版本 A	