
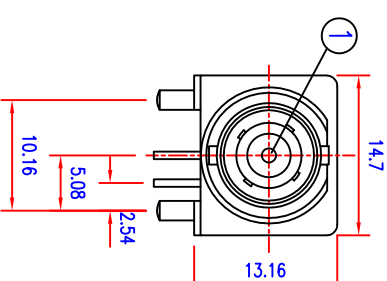
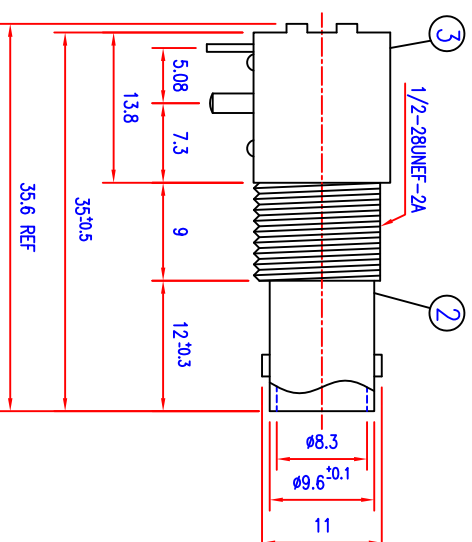
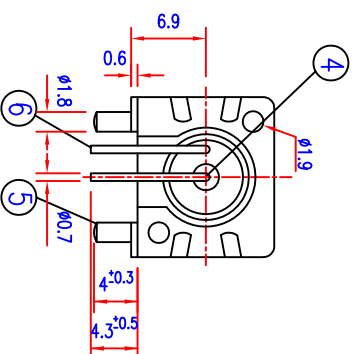


ROHS

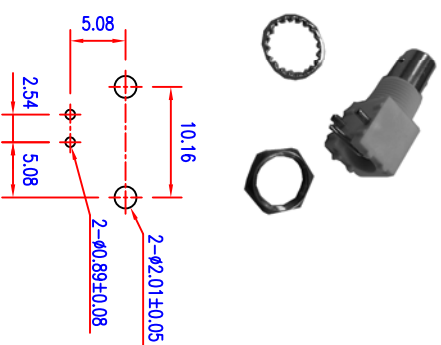

PC BOARD LAYOUT

HOW TO ORDER

ITEM NO.	H	ohms
TL4258-13.16-75R+NW	13.16	75R

SPECIFICATION




BNC CONNECTOR

RIGHT ANGLE FEMALE PANEL MOUNT WITH NUT AND WASHER

NICKEL PLATED H=13.16 , 75ohms

BNC 母，90° 腳，鍍鍍，附件全

符合 RoHS 環保規格



LOCK WASHER
(+1=0.5 +2=0.9)

(t1=0.5,t2=0.9)

1/2-28UNEF-2B CLAMP NUT

RECOMMENDED MOUNTING HOLE
MAXIMUM PANEL THICKNESS : 5.5MM

8	NUT	BRASS		NICKEL PLATING		
7	WASHER	STEEL		NICKEL PLATING		
6	SOLDER TAIL	COPPER,WIRE		TIN PLATING		
5	MOUNTING POST	BRONZE		TIN PLATING		
4	INSULATOR	PE-606				
3	HOUSING	PBT		WHITE		
2	BODY	ZINC		ALLOY NICKEL PLATING		
1	CENTER CONTACT	BRONZE		GOLD PLATING		
NO.	DESCRIPTION	QTY	MATERIAL	SPECIFICATION	REMARK	
DRAW BY	CHUN	122309	SCALE	1 : 1.5	TL4258-13.16-75R	
DEGN BY	YANG				+NW	
APPD BY	RAY		UNIT	MM		
		PROJ		 	TITLE	BNC CONNECTOR

UNLESS OTHERWISE SPECIFIED
GENERAL TOLERANCES

$$\begin{aligned} 0.5 \sim 6 &= \pm 0.2 \\ >6 \sim 30 &= \pm 0.4 \\ >30 \sim 120 &= \pm 0.6 \end{aligned}$$

DATE	DRAWG BY	REVISED	△	同利企業有限公司	TELE LONG ENTERPRISE CO.,LTD	DWG NO.	TL4258-13.16-75R+NW TPS33-(7BR-01211)-A